


S-279 / M-279

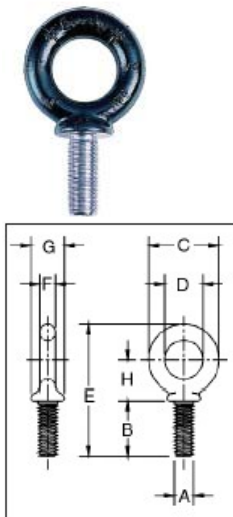

Size	S-279 Stock No.	Working Load Limit * (lbs.)	Weight per 100 (lbs.)	Dimensions (in.)							
				A** Thread	B	C	D	E	F	G	H
1/4 x 1	9900182	650	5.00	1/4 - 20	1.02	1.13	.75	2.29	.19	.53	.70
5/16 x 1-1/8	9900191	1200	9.00	5/16 - 18	1.15	1.38	.88	2.74	.25	.59	.90
3/8 x 1-1/4	9900208	1550	15.00	3/8 - 16	1.27	1.62	1.00	3.07	.31	.69	1.00
1/2 x 1-1/2	9900217	2600	28.00	1/2 - 13	1.53	1.95	1.19	3.70	.38	.91	1.20
5/8 x 1-3/4	9900226	5200	55.00	5/8 - 11	1.79	2.38	1.38	4.45	.50	1.13	1.47
3/4 x 2	9900235	7200	96.00	3/4 - 10	2.05	2.76	1.50	5.07	.63	1.38	1.64
7/8 x 2-1/4	9900244	10600	154.00	7/8 - 9	2.31	3.25	1.75	5.87	.75	1.56	1.94
1 x 2-1/2	9900253	13300	238.00	1 - 8	2.57	3.76	2.00	6.66	.88	1.81	2.21
1-1/4 x 3	9900262	21000	399.00	1 1/4 - 7	3.09	4.50	2.50	7.95	1.00	2.28	2.61
1-1/2 x 3-1/2	9900271	24000	720.00	1 1/2 - 6	3.60	5.50	3.00	9.49	1.25	2.75	3.14

Size	M-279 Stock No.	Working Load Limit * (kg)	Weight Each (kg)	Dimensions (mm)							
				A** Thread	B	C	D	E	F	G	H
M6 x 1.0	1045753	200	.03	M6 x 1.0	13.0	28.7	19.1	49	4.9	13.5	21.7
M8 x 1.0	1045789	400	.05	M8 x 1.25	13.0	35.1	22.4	56	6.4	15.0	25.5
M10 x 1.5	1045833	640	.07	M10 x 1.5	17.0	41.1	25.4	64	7.9	17.5	26.5
M12 x 1.75	1045869	1000	.11	M12 x 1.75	20.5	49.5	30.2	78	9.7	23.1	32.8
M16 x 2.0	1045913	1800	.25	M16 x 2.0	27.0	60.5	35.1	97.5	12.7	28.7	40.3
M20 x 2.5	1045995	2500	.42	M20 x 2.5	30.0	70.0	38.1	110	16.0	35.1	45.0
M24 x 3.0	1046029	4000	1.05	M24 x 3.0	36.0	95.5	51.0	143	22.4	46.0	59.3
M30 x 3.5	1046075	6000	1.77	M30 x 3.5	45.0	114	63.5	174	25.4	58.0	72.0
M36 x 4.0	1046109	8500	3.12	M36 x 4.0	54.0	140	76.0	212	31.8	70.0	88.0